

C600 600kW Power Package Liquid Fuels



Achieve lower emissions and reliable electrical/thermal generation with diesel, kerosene or aviation fuel.

- Lower utility costs – 33% electrical efficiency over a very wide operating range
- Cost savings – low maintenance air bearings require no lube oil or coolant
- Ultra-low emissions – better than tough, global standards
- High availability – partial load redundant, technology field proven over tens of millions of operating hours
- Easy, low cost installation – integrated utility synch and protection, modular design
- 5 and 9 year Factory Protection Plans available
- Remote monitoring and diagnostic capabilities
- Upgradable to 800kW or 1MW with field installed Capstone 200kW power module



C600 600kW Power Package

Electrical Performance⁽¹⁾

Electrical Power Output	600kW
Voltage	400–480 VAC
Electrical Service	3-Phase, 4 wire
Frequency	50/60 Hz, grid connect operation 10–60 Hz, stand alone operation
Maximum Output Current	870A RMS @ 400V, grid connect operation 720A RMS @ 480V, grid connect operation 930A, stand alone operation ⁽²⁾
Electrical Efficiency LHV	33%

Fuel/Engine Characteristics⁽¹⁾

Liquid Fuels	Diesel (ASTM D975-07b Grade Low Sulfur No. 1-D, 2-D) Aviation (ASTM D1655 Jet-A, MIL-DTL-83133E JP-8, MIL-DTL-5624U JP-5) Kerosene (ASTM D3699 1-K, JIS K2203)
Inlet Pressure	-35 to +35 kPa gauge (-5 to +5 psig)
Fuel Flow HHV	7,200 MJ/hr (6,840,000 BTU/hr)
Net Heat Rate	10.9 MJ/kWh (10,000 BTU/kWh)

Exhaust Characteristics⁽¹⁾

Exhaust Gas Flow	4.0 kg/s (8.8 lbm/s)
Exhaust Gas Temperature	280°C (535°F)
Exhaust Energy	4,260 MJ/hr (4,050,000 BTU/hr)

Reliable power when and where you need it. Clean and simple.

Dimensions & Weight⁽³⁾

Width x Depth x Height	2.4 x 9.1 x 2.9 m (96 x 360 x 114 in)
Weight – Grid Connect Model	12565 kg (27,700 lbs)
Weight – Dual Mode Model	15014 kg (33,100 lbs)

Minimum Clearance Requirements⁽⁴⁾



Vertical Clearance	0.6 m (24 in)
Horizontal Clearance	
Left & Right	1.5 m (60 in)
Front	1.5 m (60 in)
Rear	1.8 m (72 in)

Sound Levels

Acoustic Emissions at Full Load Power	
Nominal at 10 m (33 ft)	65 dBA

Planned Certifications

- Certified to UL 2200 and UL 1741
- Meets statewide utility interconnection requirements for California Rule 21 and the New York State Public Service Commission
- Materials Equipment Acceptance (MEA) approval for New York City
- Models available with optional equipment for CE Marking

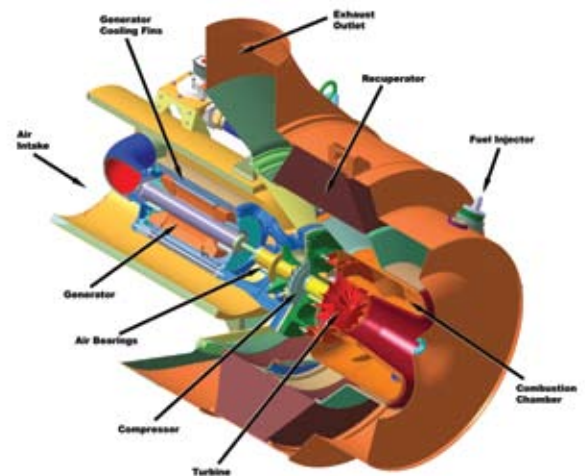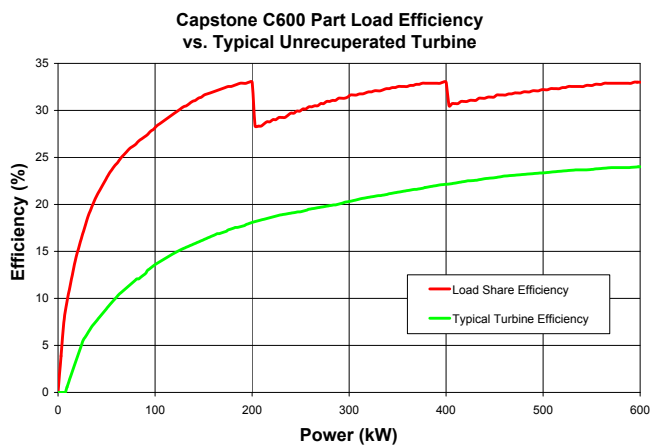

C200 Engine

(1) Nominal full power performance at ISO conditions: 59°F, 14.696 psia, 60% RH
(2) With linear load
(3) Approximate dimensions and weights
(4) Clearance requirements may increase due to local code considerations
Specifications are not warranted and are subject to change without notice.

